



# SERIES TS 930 • 125 - 2000 AMP AUTOMATIC TRANSFER SWITCHES

EXPORT IEC RATED

**REGAL**®

## THOMSON POWER SYSTEMS TS 930 AUTOMATIC TRANSFER SWITCHES OFFER THE FOLLOWING:

### POWER CONTACTOR SWITCHING UNITS

- 100% Continuous Current Ratings for use with all load types
- Suitable for Copper power cable connections
- High Short Circuit Withstand Ratings when used with upstream molded case circuit breakers

### RELIABLE SOLENOID OPERATED TRANSFER MECHANISM

- Three Position Power Contactor provides optional neutral delay position
- Single Coil Power Contactor Design for reliable operation
- Excellent Breaking capacity utilizing large arc chambers
- Electrical and Mechanical Interlocked mechanism prevents simultaneous closure between Utility and Generator sources

### SUPERIOR SERVICEABILITY

- Plug-in Control Devices allow superior field serviceability
- Enclosed Power Contacts for safe operation and maintenance

### CONTROL FEATURES

- Door Mounted ATS Controller, Graphical LCD Display with user programmable timers and protection set points
- Load Power Metering (Optional)
- Choice of Deep Sea Electronics™ or ComAp™ ATS controller
- Programmable Inputs & Outputs

### PRODUCT DATA

- 125A - 2000A Models
- 120 - 480V, Three Phase 4 wire c/w Neutral
- 3 Pole, 50/60hz
- NEMA 1 Enclosure

### QUALITY ASSURANCE

- ISO 9001 Registered Manufacturing Facilities

### SAFETY STANDARDS

- Complies with IEC 947- 6-1 Automatic Transfer Switches

### WARRANTY

- 2 year limited warranty included

**Thomson Power Systems TS 930** Automatic Transfer Switches employ a power contactor switching unit with a micro-processor based controller to automatically start a generator and transfer system load to the generator supply in the event of a utility supply failure. System load is automatically re-transferred back to the utility supply following restoration of the utility power source to within normal operating limits. All load transfer sequences are "Open Transition" (i.e. "break-before-make"). Molded case circuit breakers or fuses with overcurrent protection are required upstream of the transfer switch. The standard TS 930 Automatic Transfer Switch is rated for 100% system load.

The TS 930 Transfer Switches use a microprocessor based controller with all the necessary control functions for fully automatic operation. The ATS controller is door mounted and operating status is provided via LED indicators and LCD graphical display.

## STANDARD FEATURES

- Normal Operation Status LED Lights: Load on Utility & Load on Generator, Utility & Generator Source Available
- Three Phase Voltage sensing on Utility & Generator Sources
- Generator AC frequency sensing
- Utility under voltage control set point
- Generator Set points: under voltage (adjustable), under frequency (adjustable)
- Front Panel configurable or via Serial/USB port
- Engine warm-up timer (adjustable)
- Utility return timer (adjustable)
- Engine start timer (adjustable)
- Engine cool down timer (adjustable)
- Local utility power fail simulation test pushbutton & LED, front faceplate mounted
- Engine start contact (5A, 120/240VAC resistive max.)
- Multilanguage support
- RTC Event and Performance Logs
- In-Phase Transfer with Passive Synch Check

## ELECTRICAL RATINGS/ENCLOSURE DIMENSIONS/CABLE TERMINALS

| MODEL       | AMPERAGE | MAX VOLTAGE | POLES | WITHSTAND CURRENT RATING<br>(1cm @ 480VAC) | DIMENSIONS <sup>1</sup>  |                         |                         | SHIPPING WEIGHT<br>lbs (kg) | TERMINAL RATING <sup>2</sup> |                |
|-------------|----------|-------------|-------|--------------------------------------------|--------------------------|-------------------------|-------------------------|-----------------------------|------------------------------|----------------|
|             |          |             |       |                                            | HEIGHT<br>INCHES<br>(mm) | WIDTH<br>INCHES<br>(mm) | DEPTH<br>INCHES<br>(mm) |                             | QTY<br>(PER PHASE)           | RANGE          |
| TS933A0125A | 125A     | 480V        | 3     | 7.65kA                                     | 33"<br>(838)             | 19"<br>(483)            | 11"<br>(279)            | 20 lbs<br>(9.1)             | 1                            | #14 - 2/0      |
| TS933A0160A | 160A     | 480V        | 3     | 17kA                                       | 33"<br>(838)             | 19"<br>(483)            | 11"<br>(279)            | 20 lbs<br>(9.1)             | 1                            | #6 - 300 mcm   |
| TS933A0200A | 200A     | 480V        | 3     | 17kA                                       | 33"<br>(838)             | 19"<br>(483)            | 11"<br>(279)            | 30 lbs<br>(13.6)            | 1                            | #6 - 300 mcm   |
| TS933A0250A | 250A     | 480V        | 3     | 17kA                                       | 33"<br>(838)             | 19"<br>(483)            | 11"<br>(279)            | 30 lbs<br>(13.6)            | 1                            | #6 - 350 mcm   |
| TS933A0400A | 400A     | 480V        | 3     | 24kA                                       | 45"<br>(1143)            | 25"<br>(635)            | 11"<br>(279)            | 70 lbs<br>(31.7)            | 2                            | #2/0 - 500 mcm |
| TS933A0630A | 630A     | 480V        | 3     | 24kA                                       | 45"<br>(1143)            | 25"<br>(635)            | 11"<br>(279)            | 80 lbs<br>(36.3)            | 2                            | #2/0 - 500 mcm |
| TS933A0800A | 800A     | 480V        | 3     | 52.5kA                                     | 78"<br>(1981)            | 30"<br>(762)            | 24"<br>(610)            | 750 lbs<br>(340.2)          | 4                            | #4 - 600 mcm   |
| TS933A1000A | 1000A    | 480V        | 3     | 52.5kA                                     | 78"<br>(1982)            | 30"<br>(762)            | 24"<br>(610)            | 750 lbs<br>(340.2)          | 4                            | #4 - 600 mcm   |
| TS933A1250A | 1250A    | 480V        | 3     | 63kA                                       | 78"<br>(1982)            | 30"<br>(762)            | 24"<br>(610)            | 750 lbs<br>(340.2)          | 4                            | #4 - 600 mcm   |
| TS933A1600A | 1600A    | 480V        | 3     | 73.5kA                                     | 78"<br>(1982)            | 30"<br>(762)            | 24"<br>(610)            | 800 lbs<br>(362.8)          | 4                            | #4 - 600 mcm   |
| TS933A2000A | 2000A    | 480V        | 3     | 84kA                                       | 78"<br>(1982)            | 30"<br>(762)            | 24"<br>(610)            | 800 lbs<br>(362.8)          | 4                            | #4 - 750 mcm   |

1 Enclosure dimensions are for reference. (DO NOT USE FOR CONSTRUCTION)

2 All cable connections rated for copper conductors only

## OPTIONAL ACCESSORIES (FIELD INSTALLABLE)

The following optional field installable accessory kits can be ordered separately by specifying the following item codes:


| CODE           | DESCRIPTION                                                          |
|----------------|----------------------------------------------------------------------|
| TS930-N3R250A  | 125A - 250A NEMA 3R Door Kit                                         |
| TS930-N3R630A  | 400A - 630A NEMA 3R Door Kit                                         |
| TS930-LPM-250  | Load Power Metering (V, A, F, kW), 125A - 250A Current Transformer   |
| TS930-LPM-400  | Load Power Metering (V, A, F, kW), 400A Current Transformer          |
| TS930-LPM-800  | Load Power Metering (V, A, F, kW), 630A - 800A Current Transformer   |
| TS930-LPM-1250 | Load Power Metering (V, A, F, kW), 1000A - 1250A Current Transformer |
| TS930-LPM-2000 | Load Power Metering (V, A, F, kW), 1600A - 2000A Current Transformer |

## SPECIFY ATS CONTROLLER

Deepsea™ DSE334



ComAp™ IntelliATS<sup>NT</sup> PWR

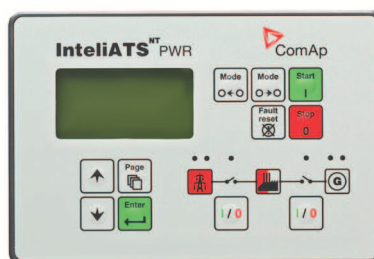

## ORDERING INFORMATION

Automatic Transfer Switch models are listed in the Electrical Rating Chart above. Please specify 11 digit model code (eg. TS933A0125A-CA or TS933A0125A-DS) plus code number for the controller and required optional items.

## CONTROLLER OPTION:

| CODE | DESCRIPTION                                        |
|------|----------------------------------------------------|
| CA   | ComAp™ IntelliATS <sup>NT</sup> PWR ATS Controller |
| DS   | Deepsea™ DSE334 ATS Controller                     |



### Thomson Power Systems

9087A - 198th Street  
Langley, BC, Canada V1M 3B1  
Customer Service: 604-888-0110  
info@thomsonps.com  
www.thomsonps.com



NOTE: Specifications subject to change without notice.

### APPLICATION CONSIDERATIONS

The proper selection and application of power generation products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and its affiliates with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, Disclaimers of Warranty, Limitation of Liability and Remedy, please contact Customer Service at 1-888-888-0110. These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use a Regal Beloit America Inc. product referred to herein, including any person who buys from a licensed distributor of these branded products.

Thomson Power Systems and Regal are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2016, 2017 Regal Beloit Corporation, All Rights Reserved. CL083r1 17/04/24

